


**bi.box LED**



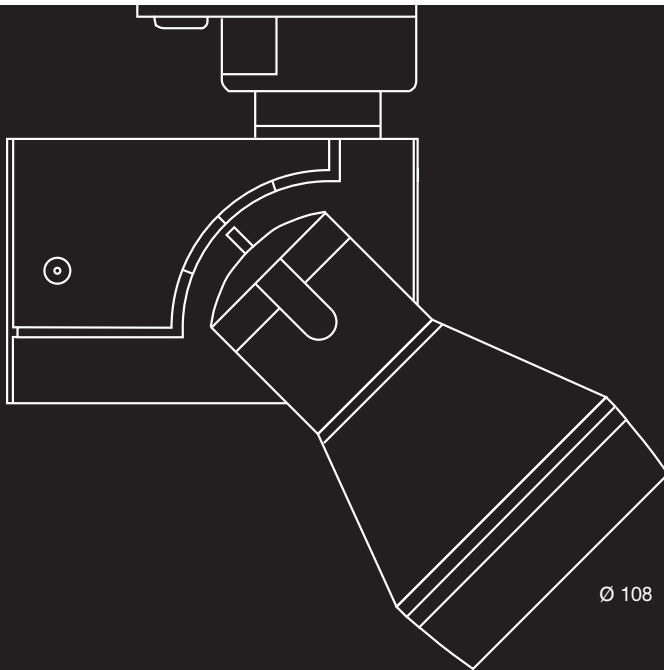

### Spotlight bi.box LED

- accent spotlight for 3-circuit tracks or with ceiling/wall plate
  - LED module with 15W output
  - excellent colour rendering index (CRI 90)
  - average life cycle of 50,000 hrs
  - colour temperature of 3100K or 4200K
  - with LED power unit (220-240V 50/60Hz)
  - integrated potentiometer
  - antiglare flaps and louvre available as accessories
  - LED operation display
  - scale ring and angle scale facilitate the targeted alignment of both optical axes
  - new versions for presentation and accent lighting in exhibition areas
  - extremely narrow beam light distributions of 8° and 15° for accent lighting and 25° medium beam light distribution
  - flexible planning thanks to the multitude of lighting system
  - accessories (filter, lens and antiglare attachments)
- Design: Ottenwälder und Ottenwälder

