




PROFILE FRAME IN TAILOR MADE

A/PROFILE

[FRAME IN profile-M]

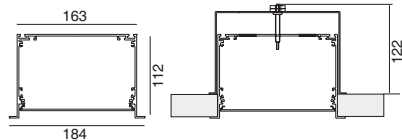



A 28200



Max. profile length is 6m.
Three circuits are standard.
Additional circuits possible.
Including built in brackets.

[FRAME IN endcap]

A 28205 |



At each endcap, an empty space of 125mm is required to allow installation of the recessed mounting brackets

B/COLOUR OPTIONS

RAL 32897


BS 32898

WS 32899

C/SHAPE


FRAME IN 90° connection horizontal

28290

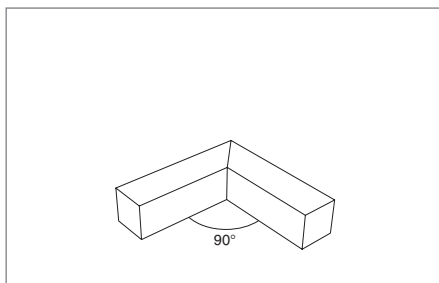


FRAME IN T-connection

28291

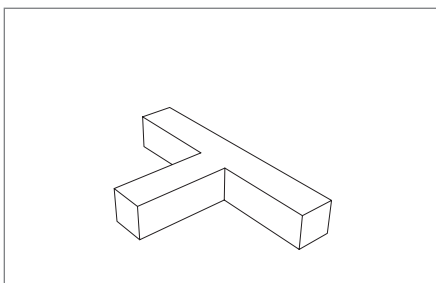

FRAME IN X-connection




28292

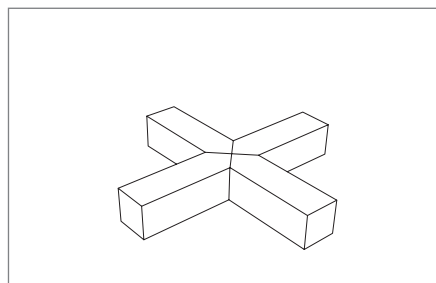

1. GENERAL LIGHTING < PLEXI

[FRAME IN module down+plexi]

≡ | G5 | EVG | 220...240V | 50...60Hz | ⚡ | (P) | IP20 | ⚡ | 950° C







		EVG	ANA DIM	DSI DIM	DALI DIM	A (mm)	B (mm)	C (mm)	⚡
2xT5-FH14W	28206	-0-000	-0-001	-0-002	-0-003	470	569		1,56
2xT5-FH21W	28302	-0-000	-0-001	-0-002	-0-003	790	869		1,75
2xT5-FH28W	28235	-0-000	-0-001	-0-002	-0-003	1110	1169		1,94
2xT5-FH35W	28212	-0-000	-0-001	-0-002	-0-003	1430	1469		2,13
2xT5-FQ24W	28229	-0-000	-0-001	-0-002	-0-003	550	590		1,56
2xT5-FQ39W	28304	-0-000	-0-001	-0-002	-0-003	790	890		1,75
2xT5-FQ54W	28227	-0-000	-0-001	-0-002	-0-003	1110	1190		1,94
2xT5-FQ49W	28238	-0-000	-0-001	-0-002	-0-003	1430	1490		2,13
2xT5-FQ80W	28239	-0-000	-0-001	-0-002	-0-003	1430	1490		2,13

Provided with a prismatic clear polycarbonate down placed in a anodised cut out cover.

[FRAME IN module down+full plexi]

≡ | G5 | EVG | 220...240V | 50...60Hz | ⚡ | (P) | IP20 | ⚡ | 950° C


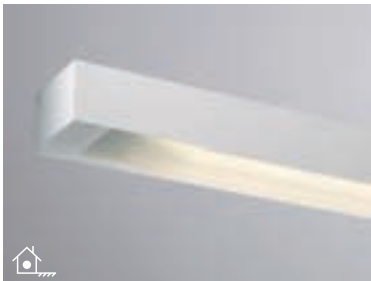


		EVG	ANA DIM	DSI DIM	DALI DIM	A (mm)	B (mm)	C (mm)	⚡
2xT5-FH14W	28240	-0-000	-0-001	-0-002	-0-003	525	590		1,56
2xT5-FH21W	28246	-0-000	-0-001	-0-002	-0-003	825	890		1,75
2xT5-FH28W	28261	-0-000	-0-001	-0-002	-0-003	1125	1190		1,94
2xT5-FH35W	28263	-0-000	-0-001	-0-002	-0-003	1425	1490		2,13
2xT5-FQ24W	28269	-0-000	-0-001	-0-002	-0-003	525	590		1,56
2xT5-FQ39W	28270	-0-000	-0-001	-0-002	-0-003	825	890		1,75
2xT5-FQ54W	28274	-0-000	-0-001	-0-002	-0-003	1125	1190		1,94
2xT5-FQ49W	28275	-0-000	-0-001	-0-002	-0-003	1425	1490		2,13
2xT5-FQ80W	28276	-0-000	-0-001	-0-002	-0-003	1425	1490		2,13

Provided with a flat opal polycarbonate cover down.

[FRAME IN module continu cross down+full plexi]

≡ | G5 | EVG | 220...240V | 50...60Hz | \triangle | P | IP20 | ⚡ | 960°C

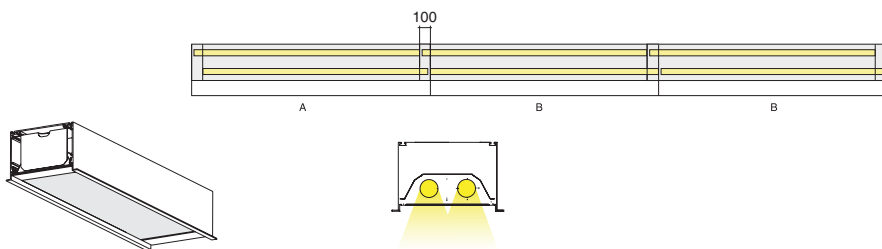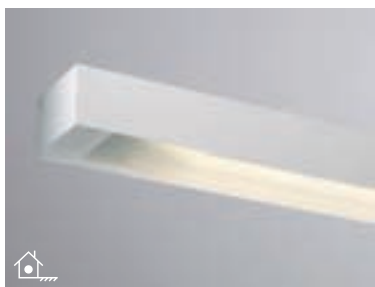


		EVG	ANA DIM	DSI DIM	DALI DIM	A (mm)	B (mm)	C (mm)	⚡
2xT5-FH14W	28281	-0-000	-0-001	-0-002	-0-003	690	590	1,56	
2xT5-FH21W	28282	-0-000	-0-001	-0-002	-0-003	990	890	1,75	
2xT5-FH28W	28283	-0-000	-0-001	-0-002	-0-003	1290	1190	1,94	
2xT5-FH35W	28284	-0-000	-0-001	-0-002	-0-003	1590	1490	2,13	
2xT5-FQ24W	28285	-0-000	-0-001	-0-002	-0-003	690	590	1,56	
2xT5-FQ39W	28286	-0-000	-0-001	-0-002	-0-003	990	890	1,75	
2xT5-FQ54W	28287	-0-000	-0-001	-0-002	-0-003	1290	1190	1,94	
2xT5-FQ49W	28288	-0-000	-0-001	-0-002	-0-003	1590	1490	2,13	
2xT5-FQ80W	28289	-0-000	-0-001	-0-002	-0-003	1590	1490	2,13	

Provided with a flat opal polycarbonate cover down.

2. GENERAL LIGHTING < DARKLIGHT

[FRAME IN module down+darklight]

≡ | G5 | EVG | 220...240V | 50...60Hz | \triangle | IP20 | ⚡ | 960°C

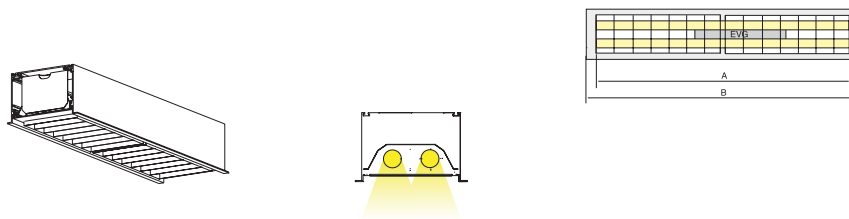


		EVG	ANA DIM	DSI DIM	DALI DIM	A (mm)	B (mm)	C (mm)	⚡
2xT5-FH14W	28297	-0-000	-0-001	-0-002	-0-003	560	590	1,55	
2xT5-FH21W	28312	-0-000	-0-001	-0-002	-0-003	860	890	1,74	
2xT5-FH28W	28271	-0-000	-0-001	-0-002	-0-003	1150	1190	1,93	
2xT5-FH35W	28298	-0-000	-0-001	-0-002	-0-003	1450	1490	2,12	
2xT5-FQ24W	28299	-0-000	-0-001	-0-002	-0-003	560	590	1,55	
2xT5-FQ39W	28317	-0-000	-0-001	-0-002	-0-003	860	890	1,74	
2xT5-FQ54W	28273	-0-000	-0-001	-0-002	-0-003	1150	1190	1,93	
2xT5-FQ49W	28293	-0-000	-0-001	-0-002	-0-003	1450	1490	2,12	
2xT5-FQ80W	28294	-0-000	-0-001	-0-002	-0-003	1450	1490	2,12	

3. ACCENT LIGHTING

656


[FRAME IN module HAL50W]



2 possibilities of lamp placement



min 400 mm between two lamps




min 200 mm between two lamps

☒ 28277

☞ | QR-CB51 20-35-50W | GU5.3 | TE

220-240V | 50-60Hz | \diamond | D | IP20 | \equiv | \odot | 950°C

[FRAME IN module 1xQR111]



2 possibilities of lamp placement



min 400 mm between two lamps




min 200 mm between two lamps

☒ 28278

☞ | QR111LP 35-50-75-100W | G53 | TE

220-240V | 50-60Hz | \diamond | D | IP20 | \equiv | \odot | 950°C

[FRAME IN module HIT-CRI 35W]




☒ 28352

☞ | HIT-CRI 35W | G8.5 | EVG

220-240V | 50-60Hz | \diamond | IP20 | \equiv | \odot | 950°C

[FRAME IN module HIT-CRI 70W]



2 possibilities of lamp placement



min 400 mm between two lamps





min 200 mm between two lamps

☒ 28355

☞ | HIT-CRI 70W | G8.5 | EVG

220-240V | 50-60Hz | \diamond | IP20 | \equiv | \odot | 950°C

[FRAME IN module Diameter 70]



☒ 28203

TE

230V | 50Hz | \triangle | D | IP20 | ---

to be ordered separately

[KIWO]





W 6031101 MC 6031340
B 6031102 G 6031405

[SLALOM M]



W 6025101 AS 6025420
B 6025102 MC 6025340
G 6025405

[FRAME IN module Diameter 82]



☒ 28204

TE

230V | 50Hz | \triangle | D | IP20 | ---


to be ordered separately

[ECCO]




W 6030101
B 6030102
MC 6030340
G 6030405

[SPINO M]



W 6027101
B 6027102
AS 6027420
MC 6027340
G 6027405

[SPINO M ES]



W 6029101
B 6029102
MC 6029340
G 6029405

E/OPTIONS

1. EXTRA CIRCUITS

☒ 24064 | Additional electric circuit

2. EMERGENCY UNITS

- ☒ 26030 | EMERGENCY UNIT 1 HOUR 14/21/28/35W
- ☒ 26031 | EMERGENCY UNIT 3 HOURS 14/21/28/35W
- ☒ 26032 | EMERGENCY UNIT 1 HOUR 24/39/54/49W

- ☒ 26033 | EMERGENCY UNIT 3 HOURS 24/39/54/49W
- ☒ 26034 | EMERGENCY UNIT 1 HOUR 80W
- ☒ 26035 | EMERGENCY UNIT 3 HOURS 80W