




PROFILE WALL STREET TAILOR MADE

A/PROFILE

[WALL STREET profile-M]

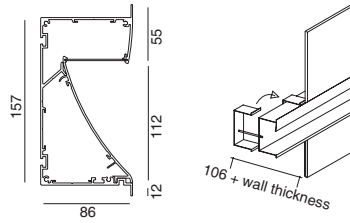


A 34600



Max. profile length is 6m.
Including special mounting brackets for hollow walls.
Two circuits as standard.
Provided with flat opal polycarbonate.


[WALL STREET endcap left]

A 34602 |



[WALL STREET endcap right]


A 34603 |



B/SHAPE

WALL STREET 60-180° connection horizontal





34604

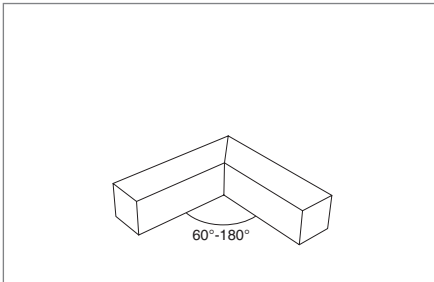

1. GENERAL LIGHTING < PLEXI

[WALL STREET module indirect+plexi]

≡ | G5 | EVG | 220...240V | 50...60Hz | | (P) | IP20 | |

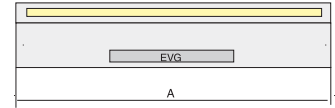
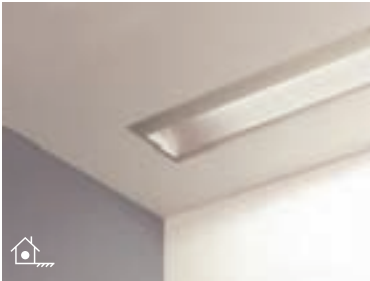


		EVG	ANA DIM	DSI DIM	DALI DIM	A (mm)	B (mm)	C (mm)	
T5-FH14W	34852	-0-000	-0-001	-0-002	-0-003	581			0,55
T5-FH21W	34854	-0-000	-0-001	-0-002	-0-003	881			0,64
T5-FH28W	34855	-0-000	-0-001	-0-002	-0-003	1181			0,73
T5-FH35W	34801	-0-000	-0-001	-0-002	-0-003	1481			0,82
T5-FQ24W	34812	-0-000	-0-001	-0-002	-0-003	581			0,55
T5-FQ39W	34814	-0-000	-0-001	-0-002	-0-003	881			0,64
T5-FQ54W	34815	-0-000	-0-001	-0-002	-0-003	1181			0,73
T5-FQ49W	34802	-0-000	-0-001	-0-002	-0-003	1481			0,82
T5-FQ80W	34803	-0-000	-0-001	-0-002	-0-003	1481			0,82

Provided with flat opal polycarbonate cover up, and aluminium anodised side cover.

[WALL STREET module DUO TL indirect+plexi]

≡ | G5 | EVG | 220...240V | 50...60Hz | | (P) | IP20 | |





		EVG	ANA DIM	DSI DIM	DALI DIM	A (mm)	B (mm)	C (mm)	
2xT5-FH14W	34804	-0-000	-0-001	-0-002	-0-003	581			0,62
2xT5-FH21W	34805	-0-000	-0-001	-0-002	-0-003	881			0,71
2xT5-FH28W	34806	-0-000	-0-001	-0-002	-0-003	1181			0,80
2xT5-FH35W	34807	-0-000	-0-001	-0-002	-0-003	1481			0,89
2xT5-FQ24W	34832	-0-000	-0-001	-0-002	-0-003	581			0,62
2xT5-FQ39W	34834	-0-000	-0-001	-0-002	-0-003	881			0,71
2xT5-FQ54W	34835	-0-000	-0-001	-0-002	-0-003	1181			0,80
2xT5-FQ49W	34808	-0-000	-0-001	-0-002	-0-003	1481			0,89
2xT5-FQ80W	34809	-0-000	-0-001	-0-002	-0-003	1481			0,89

Provided with flat opal polycarbonate cover up, and aluminium anodised side cover.

[WALL STREET module direct+plexi]

≡ | G5 | EVG | 220...240V | 50...60Hz | \triangle | (P) | IP20 | \rightarrow | 90° C



		EVG	ANA DIM	DSI DIM	DALI DIM	A (mm)	B (mm)	C (mm)	\triangle
T5-FH14W	34810	-0-000	-0-001	-0-002	-0-003	523	581		0,63
T5-FH21W	34811	-0-000	-0-001	-0-002	-0-003	820	881		0,68
T5-FH28W	34813	-0-000	-0-001	-0-002	-0-003	1118	1181		0,73
T5-FH35W	34817	-0-000	-0-001	-0-002	-0-003	1416	1481		0,78
T5-FQ24W	34822	-0-000	-0-001	-0-002	-0-003	523	581		0,63
T5-FQ39W	34824	-0-000	-0-001	-0-002	-0-003	820	881		0,68
T5-FQ54W	34825	-0-000	-0-001	-0-002	-0-003	1118	1181		0,73
T5-FQ49W	34818	-0-000	-0-001	-0-002	-0-003	1416	1481		0,78
T5-FQ80W	34819	-0-000	-0-001	-0-002	-0-003	1416	1481		0,78

Provided with aluminium cover up, and aluminium anodised side cover with oval slots of 32x232mm covered with a flat sandblasted polycarbonate.

D/OPTIONS

1. EXTRA CIRCUITS

24064 | Additional electric circuit

2. EMERGENCY UNITS


- 26030 | EMERGENCY UNIT 1 HOUR 14/21/28/35W
- 26031 | EMERGENCY UNIT 3 HOURS 14/21/28/35W
- 26032 | EMERGENCY UNIT 1 HOUR 24/39/54/49W
- 26033 | EMERGENCY UNIT 3 HOURS 24/39/54/49W
- 26034 | EMERGENCY UNIT 1 HOUR 80W
- 26035 | EMERGENCY UNIT 3 HOURS 80W

[WALL STREET]

662



Cut an opening of 161mm x L, into the wall or ceiling. Ceiling/wall thickness: 5-30mm

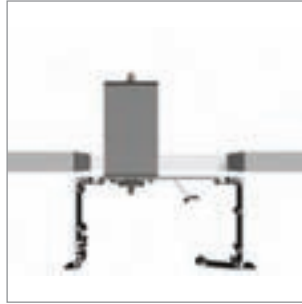

Turn the bracket in line with the profile and insert the profile till the bracket can be turned into the profile (the required height of the false ceiling is 106mm + the thickness of the ceiling).




Turn the bracket a quarter. The profile is now fixed.



Mount the profile to the ceiling or wall with the wing nuts.



Remove the additional tool.

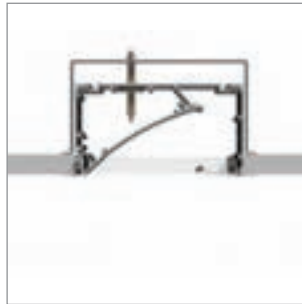

Click the cover into the profile.

